

ANZ Floor

You stand on it
We stand behind it



ANZ Flooring., JSC

www.anzfloor.com

About Us

Following the success of our first SPC factories, ANZ Flooring was established to meet the market demand for SPC flooring products.

Being made in Vietnam, our products are highly appreciated in the North America & Europe, Ocean Pacific market.

Proud to be the leading manufacturer of SPC Flooring in Vietnam, ANZ Flooring is committed to providing customers with the best quality products and services.



SPC Flooring Introduction:


What is SPC Flooring?

SPC (Stone Plastic Composite) Click Flooring is best known for being 100% waterproof, enhanced stability, high performance, high wear resistance, pet-friendly,...

With click system for installation, you can totally DO it YOURSELF. SPC can be easy to installed on variety of subfloors include concrete or existing vinyl floor.

This eco-friendly product with 100% virgin PVC, nano calcium powder, has no hazardous chemicals.

Available in both plank and tile shapes, SPC Flooring brings a luxury look to both commercial and residential usages.

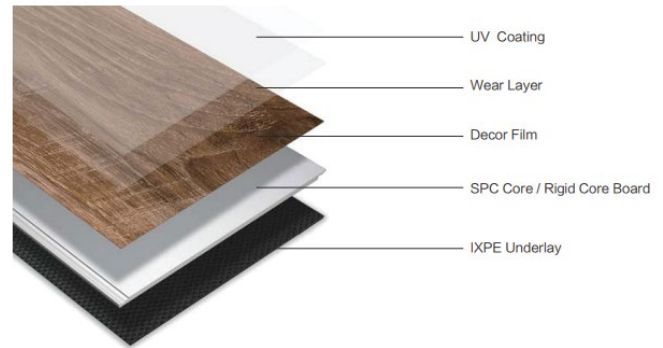

SPC Flooring

UV Coating: To cover the decor film on SPC Flooring to make it anti-fading to sun light near window or any other indoor environment.

Wear layer: To provide resistance to scratches and stains and is easy to keep clean.


Decor Film: To provide the decoration for the plank. Colors and patterns are printed onto the vinyl.

SPC core: This is the dense, waterproof core for the plank made of natural limestone powder, polyvinyl chloride, and stabilizers. It provides rigidity and stability for the plank.

Underlayment: This layer is generally made from IXPE or EVA foam, which provides sound insulation and cushioning.




Advantages of SPC Flooring

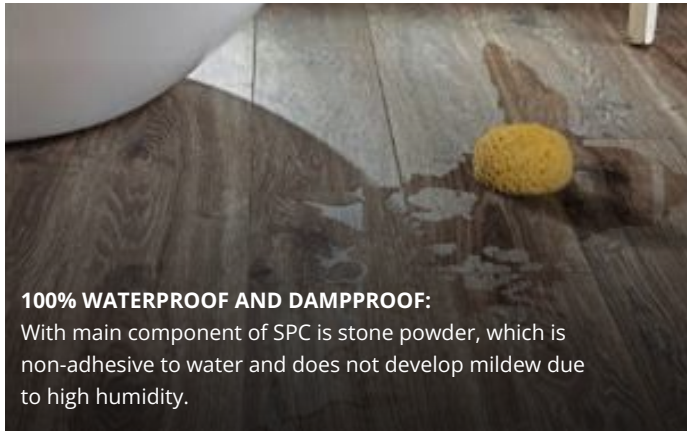


100% WATERPROOF AND DAMPPROOF:

With main component of SPC is stone powder, which is non-adhesive to water and does not develop mildew due to high humidity.

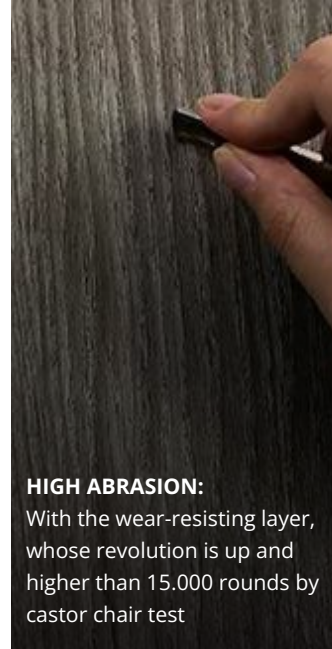

HIGH ABRASION:

With the wear-resisting layer, whose revolution is up and higher than 15,000 rounds by castor chair test

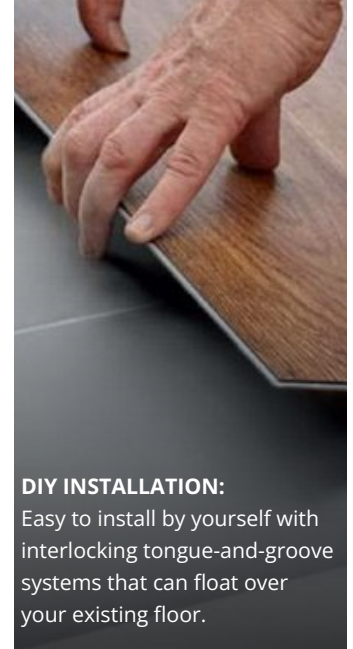


DIY INSTALLATION:

Easy to install by yourself with interlocking tongue-and-groove systems that can float over your existing floor.



ANTI-SLIPING:

With the wear-layer SPC have higher friction when it's wet.

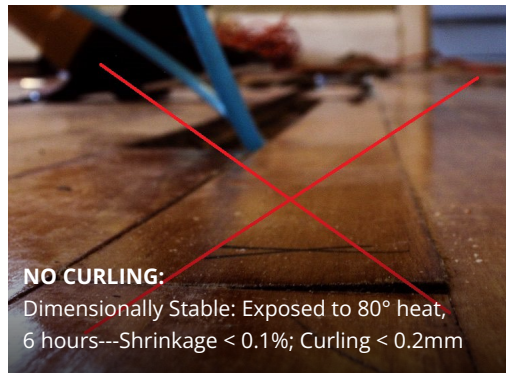


NO CURLING:

Dimensionally Stable: Exposed to 80° heat, 6 hours---Shrinkage < 0.1%; Curling < 0.2mm



NO FORMALDEHYDE:


By strictly control process and high quality stone powder & PVC without harmful material such as benzene, formaldehyde, heavy metal.

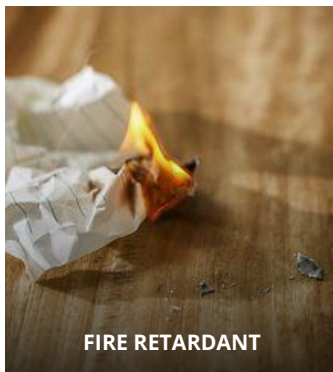

FIRE RETARDANT



STAIN RESISTANCE

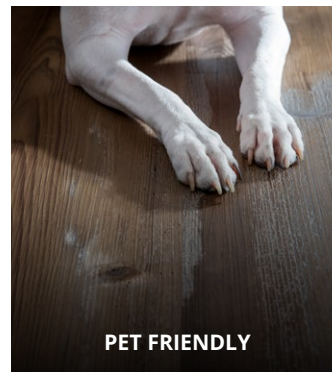

PET FRIENDLY



TERMITE PROOF

Specification


- **SPC Core Thickness:** 3.0mm- 6.0mm
- **Wear layer:** 0.2mm-0.55mm
- **Size (mm):** 1220x150; 1235x178; (Can be customized)
- **Padding:** EVA; IXPE; CORK
- **Surface:** BP, EIR, Glossy
- **Material:** 100% Virgin
- **Click Lock:** Valinge 2G, I4F
- **Edges:** Micro-bevel, Painted Bevel



TECHNICAL DATA SHEET		
Characteristic	Detection Method	Detection Result
Bending Strength	≥ 15.0 Mpa	EN310
Elasticity Modulus	≥ 3500 Mpa	EN310
Anti-Scratch	Level 1	EN 16094
Density	Core: 2100 ± 100 Wearlayer: 1200 ± 100	EN 436
Scatch - Resistant	Rating 1 -2	EN 16094
Impact Resistance	≥ 1600mm (big ball) ≥ 20N (small ball)	EN 13329
Pelling Strength	≥ 70 (N/50mm)	EN431
Click Tension Force	≥ 180 (N/100mm)	NA

Our Collection


Wood - look




ANZ - 8013-1




ANZ - 8999-6




ANZ - 48013-7




ANZ - 0007-8



ANZ - 8003-5



ANZ - 8042-12




ANZ - 0007-3



ANZ - 329-01



ANZ - 1063-1



ANZ - 2002-2




ANZ - 1063-2



ANZ - 380



ANZ - 8042-03



ANZ - 1179



ANZ - 2066-12



ANZ - 305-25

Our Collection

Wood - look



ANZ - 318-15




ANZ - 2006-03




ANZ - 1179



ANZ - 1001-4



ANZ - 2003-10



ANZ - 1002-26



ANZ - 4136



ANZ - 8059-2



ANZ - 1063-1




ANZ - 1099




ANZ - 2002-3




ANZ - 2003-5



ANZ - 113-3



ANZ - 8059-004




ANZ - 8052-2



ANZ - 2001

Our Collection

Wood - look




ANZ - 1223-44



ANZ - 1020



ANZ - 43104




ANZ - 380-1




ANZ - 88020-3



ANZ - 5018-6A



ANZ - 8024



ANZ - 8076-3



ANZ - 329-16



ANZ - 4146-9



ANZ - 6179-1



ANZ - 305-25



ANZ - 810-12



ANZ - 210114-10



ANZ - 340-03



ANZ - 2010

Our Collection

Wood - look



ANZ - 1103L-5



ANZ - 1055-4



ANZ - 340-02



ANZ - 909-08




ANZ - 643-03



ANZ - 64319



ANZ - 210102-10




ANZ - 4138



ANZ - 313-16



ANZ - 4134



ANZ - 112-12




ANZ - 64317




ANZ - 1089-1



ANZ - 8076-5



ANZ - 261-1



ANZ - 1222-14

Our Collection

Stone - look



ANZ - 2007



ANZ - 2007



ANZ - 2593




ANZ - 6002





SPC dryback

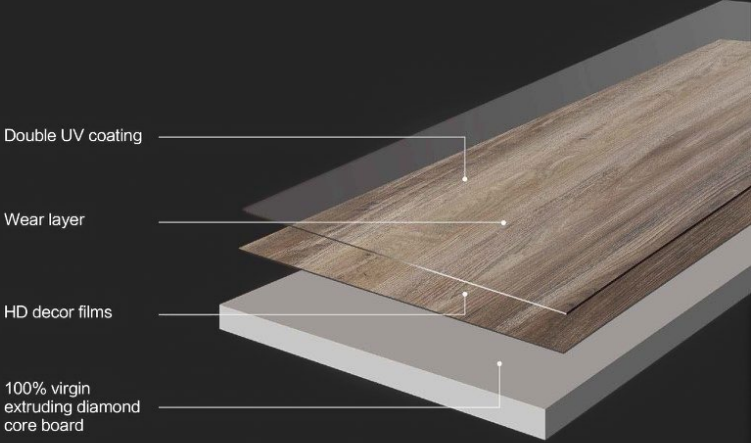

SPC Core Thickness	2.0mm-4.0mm
Wear layer	0.2mm-0.55mm
Size (mm)	230/185 x1532 /1220mm (can be customized)
Padding	EVA; IXPE; CORK
Surface	BP, EIR
Material	100% Virgin
Installation	Glue down, no click
Edges	Micro-bevel, Painted Bevel

Packing & Loading


- Strictly packing and loading standard:
- Wood pallets with heat treatment
- Top cover board
- Shrink-wrap



- 4 edges protection
- Using rope and air bag when loading
- Clean inside and outside container
- Fumigation

Quality Control



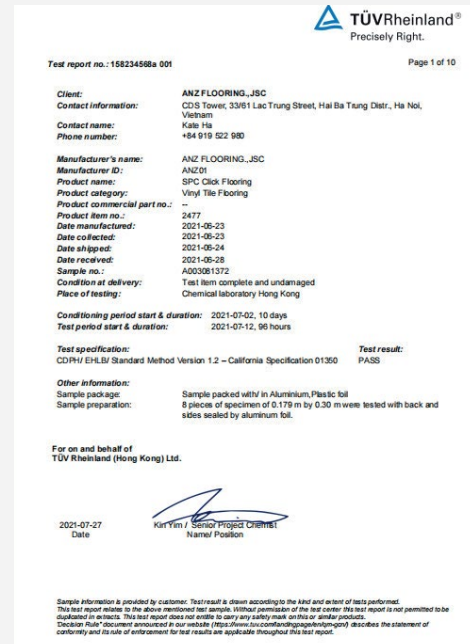



Address: Nam Son Industrial Zone, Nam Son Commune,
Ba Che District, Quang Ninh Province, Vietnam.

Hotline: +84 919 522 980.

www.anzfloor.com.


ANZ Floor